
ITEM NO.: B5355DU-BK

ASSEMBLY INSTRUCTIONS

- 1. Pass the wires through the hanging rod (B) and screw the rod into the threaded tube on the lamp body (A).
- 2.Open the screwgates of carabiners on the chain (C) and connect the carabiners with the loops on the hanging rod (B) and the canopy (D).
- 3.Install the mounting plate (E) on the outlet box with the screws (F).
- 4.Loosen the hex nut around the bolts (G) and screw in or unscrew the bolts from the junction box to get the right length for installation.
- 5. Connect the fixture wire to the circuit wire with the wire nuts (H): black wire with live wire, white wire with neutral wire, ground wire with ground wire. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape.
- 6. Fix the lamp body (D) to the mounting plate (E) with the ball nuts (J).
- 7. Screw the bulb (K) into the lamp holder.
- 8. Align the screw thread of the glass shade (L) with the protruding point on the base (M) and screw the glass shade into the base.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

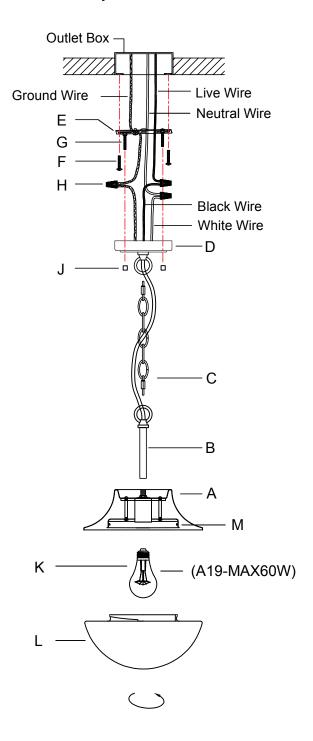

You can turn the pendant light into a semi flush-mount ceiling light by removing the ring attached to the canopy and the hanging rod and screwing the canopy into the hanging rod.

